



# FIG. 1

## NEW METHOD


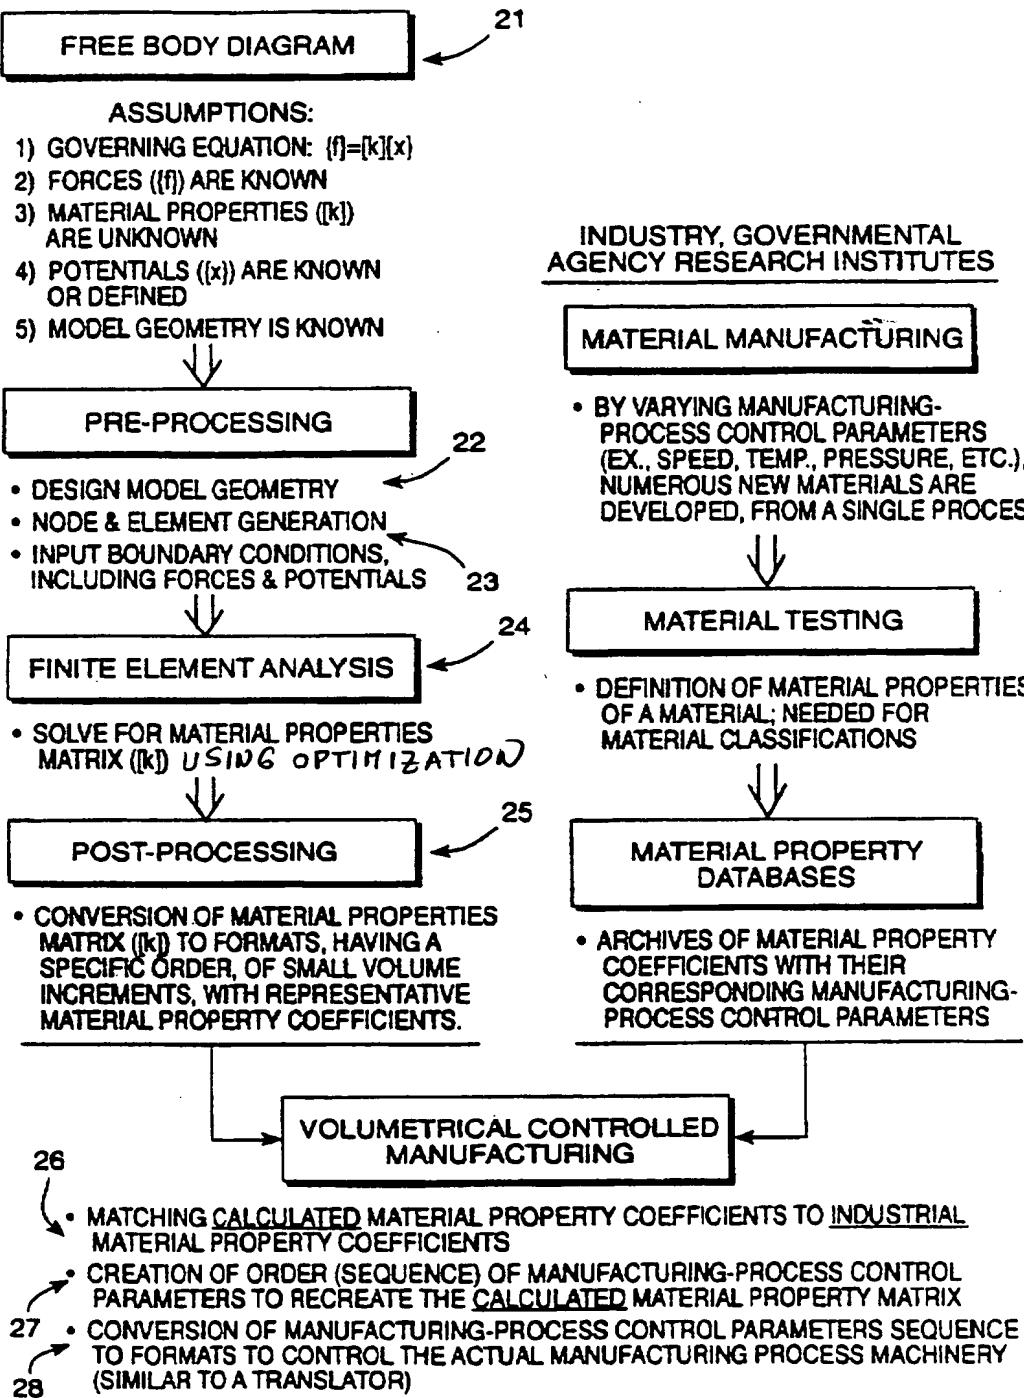





FIG. 2A

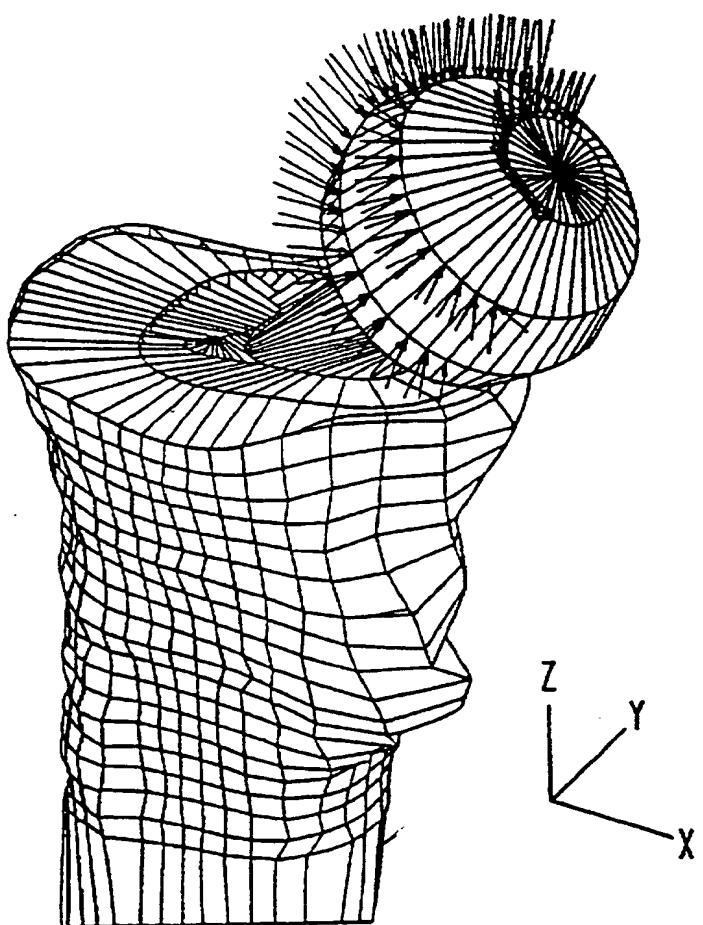

PRIOR ART



FIG. 2B

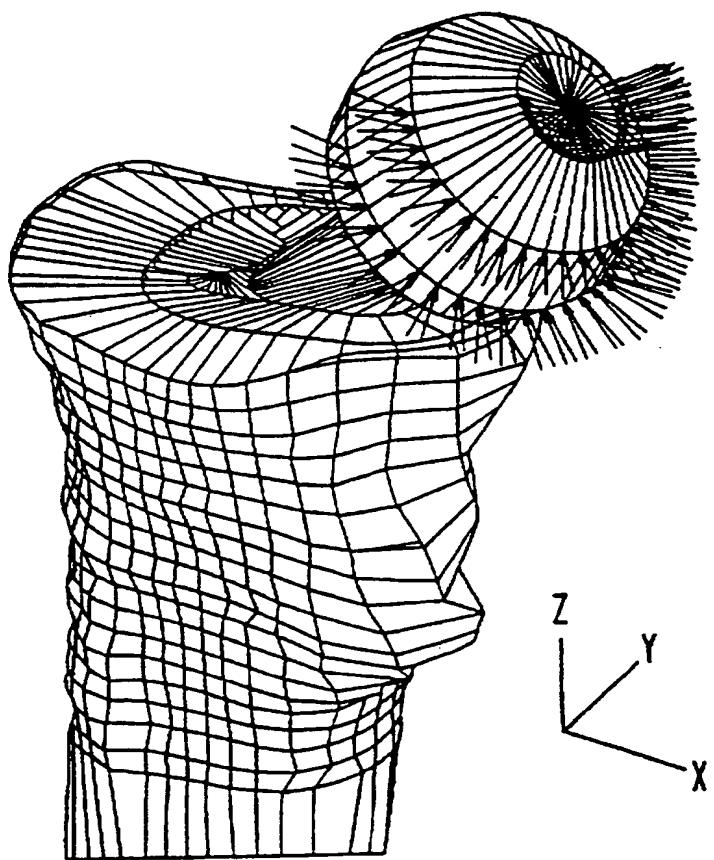

PRIOR ART

O I P E  
OCT 26 2002  
PENT & TRADEMARK OFFICE

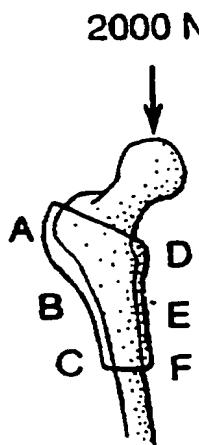



FIG. 3A  
PRIOR ART

	INTACT FEMUR
A	$0.221 \pm 0.057$
B	$0.875 \pm 0.119$
C	$0.698 \pm 0.122$
D	$1.217 \pm 0.150$
E	$1.315 \pm 0.131$
F	$1.208 \pm 0.131$

FIG. 3B  
PRIOR ART



FIG. 4

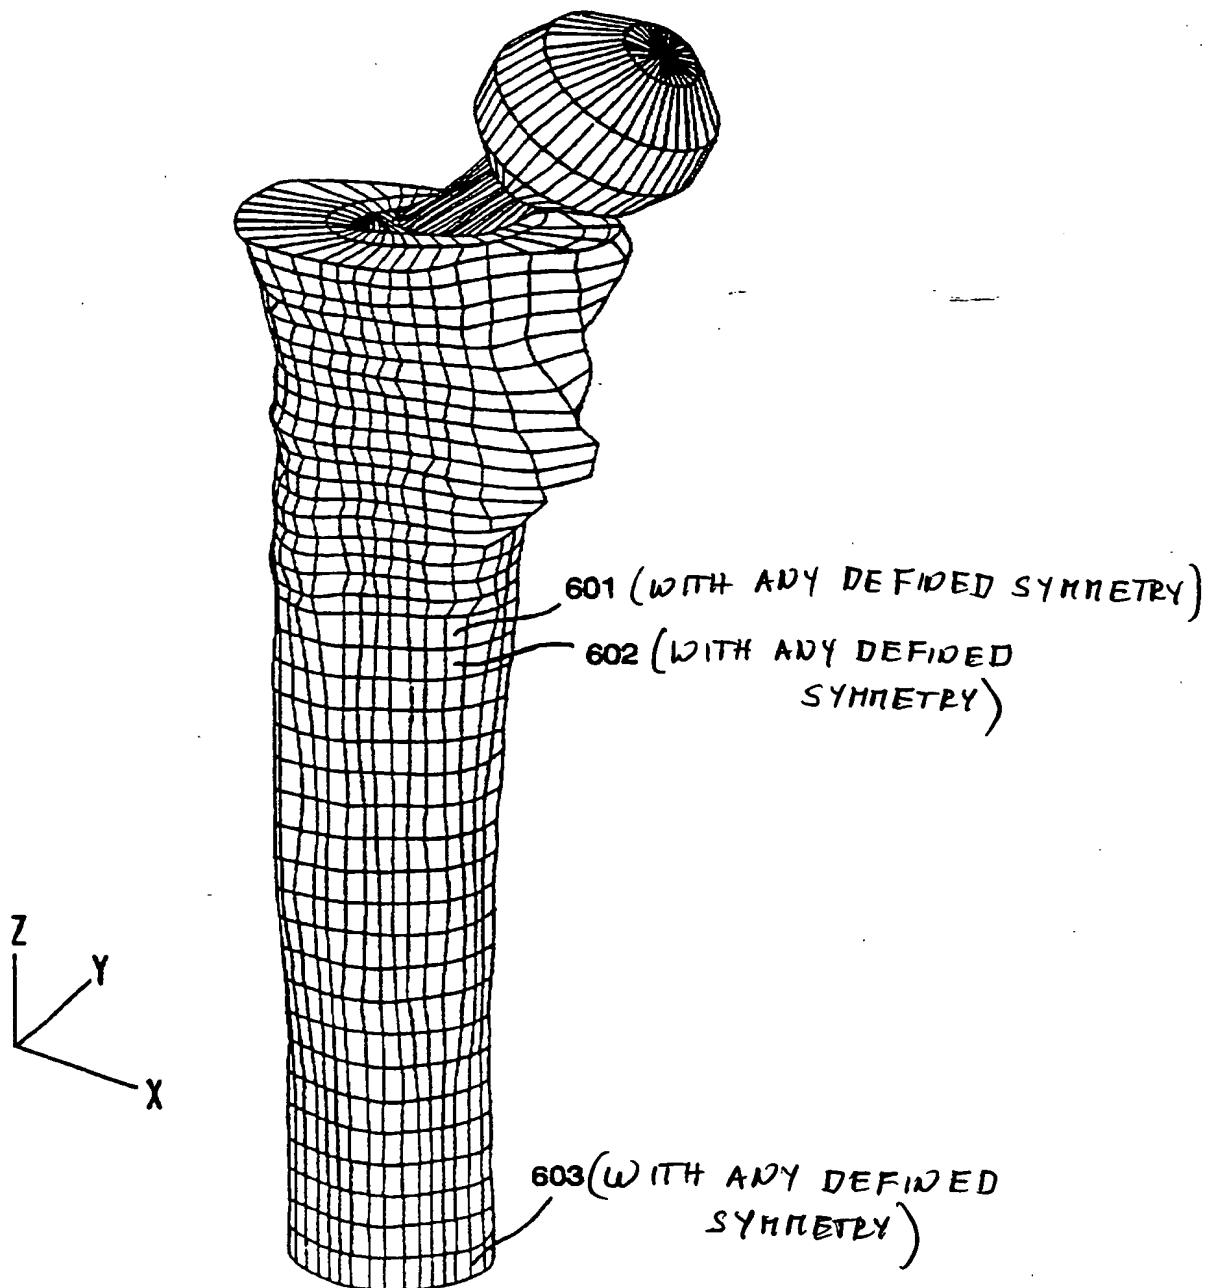



M1-1	E1-1	$\sigma_1-1$	PROCESS	PROCESS PARAMETERS
M1-2	E1-2	$\sigma_1-2$	PROCESS	PROCESS PARAMETERS
:	:	:	:	:
M1-n	E1-n	$\sigma_1-n$	PROCESS	PROCESS PARAMETERS

700

FIG. 5A  
PRIOR ART


M2-1	$\sigma_2-1$	PROCESS	PROCESS PARAMETERS
M2-2	$\sigma_2-2$	PROCESS	PROCESS PARAMETERS
:	:	:	:
M2-n	$\sigma_2-n$	PROCESS	PROCESS PARAMETERS

701

FIG. 5B  
PRIOR ART



FIG. 6

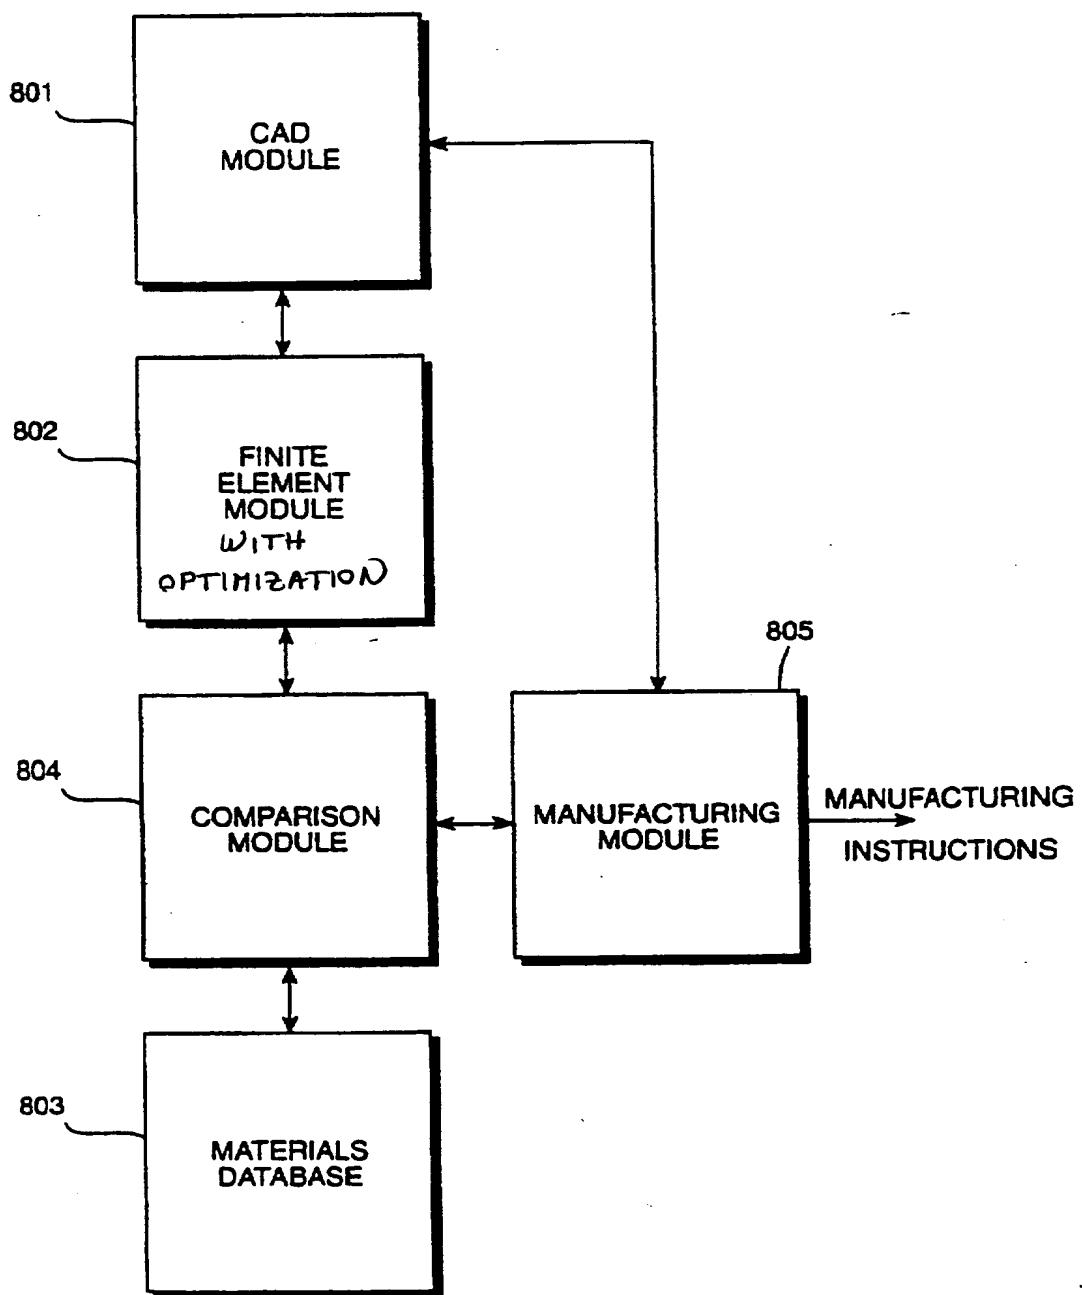




FIG. 8

